

Wireless Temperature Sensor



For more information, contact:
sales@episensor.com


visit <http://episensor.com> or call +353 61 512 500

// Introduction


EpiSensor's TES is a flexible, highly accurate wireless ambient temperature sensor. It can monitor environmental conditions in buildings and assets remotely and securely via the EpiSensor Gateway, providing facility managers with the granular real-time data they need to improve efficiency, reduce costs and improve performance.

// Key Features

- Security from edge to cloud
- Fully wireless communications
- Up to 10 year battery life
- Vented ABS Enclosure
- Over-the-air software upgrade capability
- Local data logging (up to 2 years)
- Self-healing mesh network
- 2.4GHz ISM band ZigBee® wireless radio

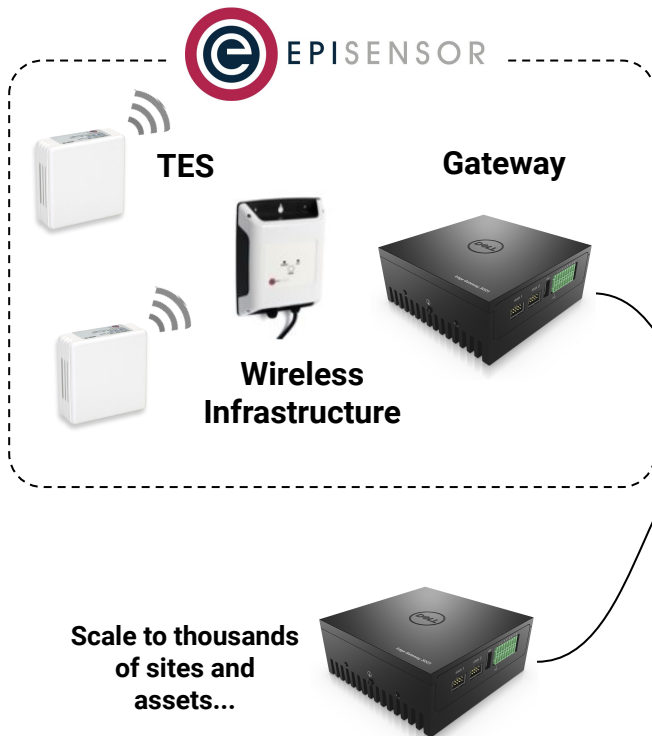

System Architecture

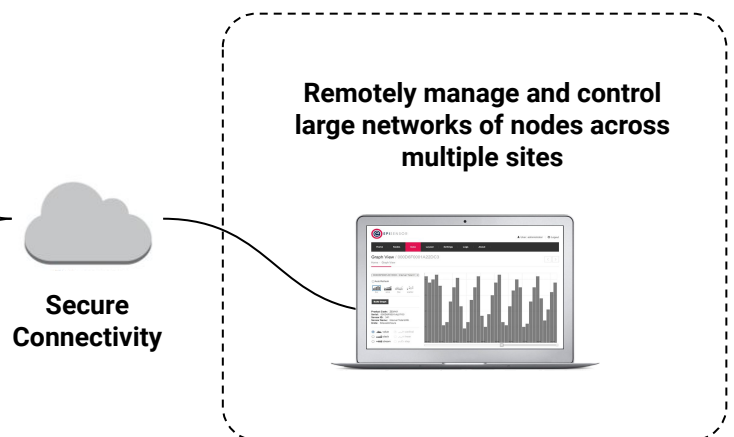

Technical Specification

// Sensor

Category	Parameter	Value
Temperature	Sensor Technology	Thermistor, NTC, 10K Ohm
	Sensor Type	Ambient, internal
	Normal Range	-20°C ~ 45°C
	Full Range	-30°C ~ 55°C
	Accuracy (Normal Range)	± 0.2°C
	Accuracy (Full Range)	± 0.5°C
	Resolution	0.01°C

// Power

Category	Parameter	Value
Battery	Nominal Voltage	3.6V
	Capacity	3.6Ah
	Chemistry	Lithium Thionyl Chloride
	Size	A
	User Replaceable	Yes
	Estimated Lifetime	up to 10 years, 15 min reporting
	Estimate based on	NTC temperature sensing only, 23° C, full wireless coverage

// Communications

Category	Parameter	Value
Wireless Sensor Network	Radio Technology	ZigBee Pro
	Radio Frequency	2.4 GHz ISM band
	Network Topology	Mesh
	Channels	16 (802.15.4 Channels 11 to 26)
	Max Tx Power	+8dBm
	Tx modulation	O-QPSK
	Rx Sensitivity	-101dBm
	Max Data Rate	256kbit/s
	Wireless Range	up to 50m indoor / 300m outdoor

Technical Specification

// Software & Security

Category	Parameter	Value
Real Time Clock & Sync	Real Time Clock Backup	Battery
	Synchronisation	NTP time server via Gateway
	Timestamp Format(s)	ISO-8601, Unix Epoch
	Timestamp Resolution	1 second
Data Logging	Storage Type	Non-volatile flash
	Capacity	up to 70,000 data points
Security	Sensor Network Encryption	AES 128-bit
	Server Communications	TLS v1.2 / various

// Operating Conditions

Category	Parameter	Value
Operating Conditions	Operating Temperature	−30°C to 55°C (−22°F to 131°F)
	Storage Temperature	−40°C to 70°C (−40°F to 158°F)
	Operating Humidity Range	up to 100%
Physical	Weight	0.1 kg
	Dimensions (W x H x D)	71mm x 71mm x 27mm
Enclosure	Material	ABS plastic
	IP degree of protection	Not applicable

// Certifications

Category	Parameter	Value
Certifications	Safety	CE
	Environmental	RoHS, WEEE
	EMC/RF	Contains FCC ID: S4GEM35XB
		Contains IC ID: 8735A-EM35XB

EpiSensor products are not suitable or specifically designed, manufactured or licensed for use in military, aviation, powerplant, medical or in other inherently dangerous or safety critical applications.

Technical Specification


// Order Codes

SKU	Description
TES-11	Vented ABS enclosure, battery powered


// Accessories & Services

SKU	Description
SV-CAL-EPI	EpiSensor calibration, Single Sensor, 1 calibration point
SV-CAL-SP-Q1	UKAS Calibration, Single Sensor, 3 calibration points (default: 0°C, 5°C and 10°C)

Installation & Safety Notes



CONTAINS LITHIUM METAL BATTERY
For more information, call +353 61 512 500



IF DAMAGED

→ EpiSensor equipment should be installed, operated, serviced and maintained only by qualified personnel. EpiSensor does not assume any responsibility for any consequences arising out of the use of this equipment.

→ For detailed installation and safety information, consult the Install Sheet.

// Contact

For technical support, please contact support@episensor.com or phone +353 61 512 500

Address: EpiSensor Ltd. Georges Quay House, Georges Quay, Limerick, V94 YW9T, Ireland

Manufactured in an ISO 9001 / ISO 14001 certified facility.

Designed and
manufactured
in Ireland

